

Attic Applications

Attic Floor / Attic Blanket

Low-E Attic Blanket Floor Application (with mass insulation)

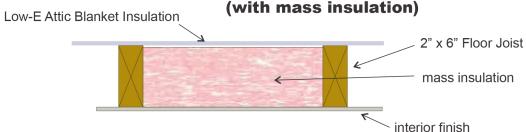

Low-E Attic Blanket can be rolled out over existing mass insulation. The product is perforated and will not trap moisture. Low-E Attic Blanket can be stapled with 1/2" staples every 6". Since it is not a vapor barrier taping of seams is optional.

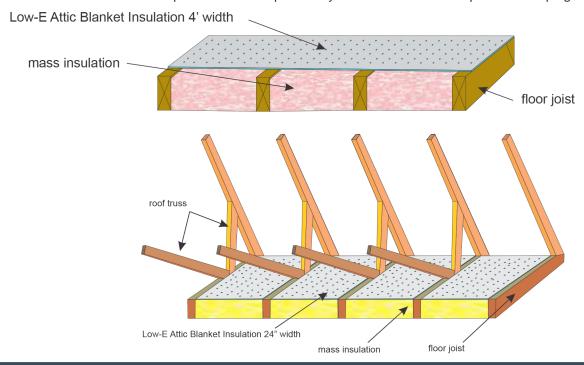

Attic Rafters / 1/8" Low-E Insulation



This installation below is for retrofitting rafters as an energy upgrade. Low-E Insulation is installed across the bottom face of the rafter. Proper ventilation must be maintained. Measure rafter area to determine square footage of Low-E Insulation required (length x width). Roll out material and fasten to bottom of rafter face with ½" staples approximately every 6 inches. We suggest starting at the peak and working down to the eave. Leave approximately ½" space at the peak for ventilation. All adjoining seams must be taped securely with Low-E tape, unless a staple flange product is used. To prevent insulation from falling from rafters, ESP Low-E recommends using lattice strips for added support.

Note: Drawings are not to scale and are meant to depict possible applications. Exact Specifications may vary. See Attic Blanket Install Guide for further instructions.